

Zurich
Instruments

UHF-AWG Arbitrary Waveform Generator

2 output channels, 1.8 GSa/s, 14-bit
600 MHz, 128 MSa waveform memory

Product Leaflet

Release date: November 2018


The UHF-AWG Arbitrary Waveform Generator integrates signal generation and detection in a single box providing a complete solution for pulsed measurement protocols. Its state-of-the-art programming concept offers a quick route to custom signals on the two 600 MHz output channels. The available detection schemes include high-speed demodulation, pulse counting and a digitizer for time domain analysis. Sequence branching based on internal measurement results enables feed-forward protocols at unparalleled speeds, making it suitable for quantum error correction. The UHF-AWG's modulation features ensure phase coherence for demanding measurement environments, such as quantum computing, mixed-signal device testing, NMR spectroscopy and more. The entire functionality is conveniently integrated into the LabOne® software enabling intuitive and platform-independent control.

Key Features

- Dual 600 MHz arbitrary waveform generator
- 14-bit resolution, 2 markers per channel
- 128 MSa waveform memory per channel
- Amplitude modulation with internal and external phase reference
- Two 600 MHz signal inputs with oscilloscope and optional demodulation, pulse counter, boxcar averager
- Cross-trigger engine for low-latency triggering and sequence branching

User Benefits

- Intuitive AWG programming language ensures a quick start and efficient use
- Controlling AWG and detection with a single user interface leads to a significant reduction of setup complexity
- The parametric Sweeper (delay, amplitude, frequency, phase, etc.) provides straightforward measurements automation
- Reduction of waiting times by fast transfer of long phase-coherent patterns thanks to modulation and sequencing
- Simple implementation of fast feed-forward and feedback protocols without FPGA programming

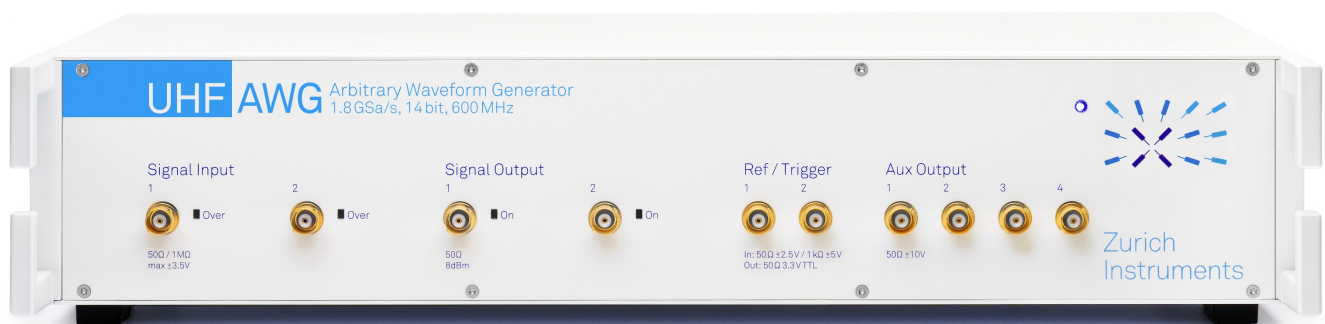

Highlights

The UHF-AWG can reproduce any waveform from a user-programmable 128 MSa memory on its two 600 MHz output channels. The high-level compiler integrated into the LabOne® user interface centralizes the tools for waveform creation and editing, sequencing, and instrument configuration, ensuring an efficient workflow towards the desired output signal.

Moreover, the UHF-AWG is equipped with two 600 MHz signal inputs and a measurement toolset offering a variety of synchronous and asynchronous detection methods. The cross-trigger engine enables bidirectional triggering between the AWG and the internal detection units, representing a superior replacement of inter-device triggering used in traditional measurement setups. It eliminates complicated synchronization methods between separate instruments for signal detection and signal generation. Instead, the measurement procedure is controlled from a single AWG program as illustrated with the example shown below.

The platform-independent LabOne user interface provides an extensive measurement and analysis toolset. With the parametric Sweeper, dependencies on AWG parameters such as waveform amplitude, delays, or carrier frequency and phase are easily measured. Continuously streamed measurement data are visualized with

the Plotter tool and offer a close monitoring of the effect of the AWG signal. Triggered recording is available using either the built-in Scope or the Software Trigger tool to support the often shot-like character of AWG measurements. The LabOne programming interfaces for Python, LabVIEW, MATLAB, and C enable quick integration into existing control software.

Description


Waveform generation and modulation

The UHF-AWG operates in direct output mode or in amplitude modulation mode. In direct output mode, the waveforms are routed directly to the DC-coupled signal outputs. The 128 MSa waveform memory and 14-bit, 1.8 GSa/s D/A conversion enable generation of high-resolution pulse shapes to reproduce a wide range of device testing conditions or to compensate for distortions occurring in the signal path. In amplitude modulation mode, each AWG channel shapes a sinusoidal signal generated by an internal oscillator. It optimizes the generation of phase-coherent pulse patterns using the sequencer and generic pulse envelopes, without which the entire waveform needed to be uploaded. This saves time and increases throughput. Variation of carrier parameters helps in cases where frequent tuning of

```
Sequence pattern_1.seqc *
1 wave w_drag = drag(800, 400, 100);
2 wave w_gauss = gauss
3
4   snippet      wave gauss(const samples, const amplitude=1.0,
5   local        w_gauss      const position, const width)
6   const CONFIG_A = 0x0f;    Gaussian pulse with arbitrary amplitude (a), position
7   const CONFIG_B = 0x1e;    (p), width (w) and number of samples (N).
8
9   repeat(1000) {
10     setInt('demods/0/oscsel', 0);
11     playWave(w_gauss);
12     setDIO(CONFIG_A);
13     wait(100);
14     setDIO(CONFIG_B);
15     setInt('demods/0/oscsel', 1);
16     playWave(w_drag);
17     setTrigger(1);
18     wait(400);
19     setTrigger(0);
20 }
```

LabOne sequence editor window with AWG program featuring waveform generation, control of multi-bit digital output, and dynamic change of carrier frequency.

Analog and digital AWG signals generated by the program on the left. Data acquisition (here: homodyne detection) is performed synchronously with signal generation.

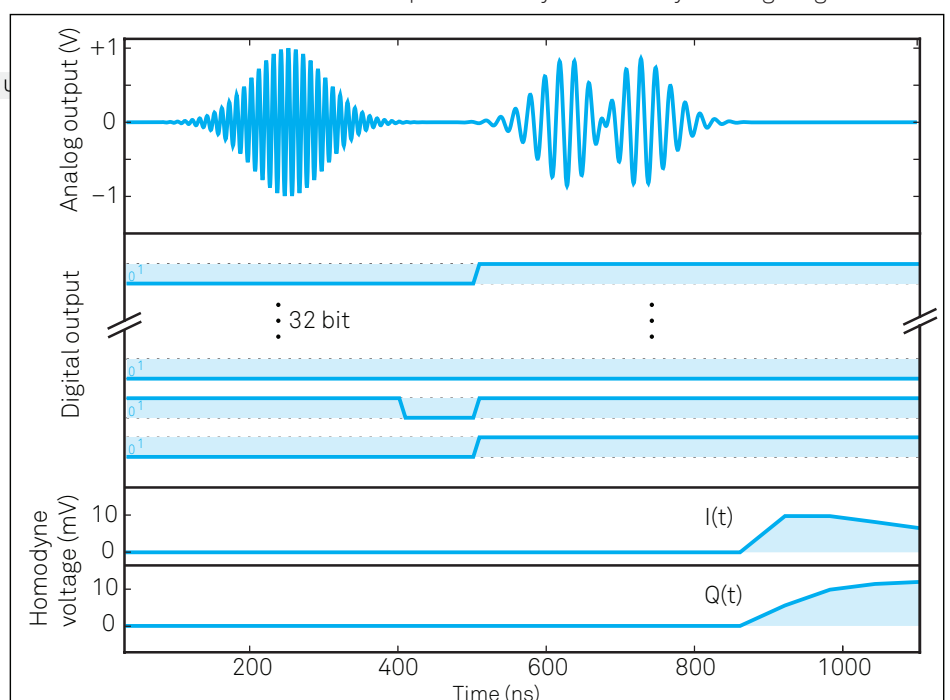

phase or frequency is required. In applications such as NMR spectroscopy that require long patterns at the full 600 MHz bandwidth, the user can reduce waveform size by specifying envelopes with a lower sampling rate than the final signal. The UHF-AWG's internal oscillators are references for both signal generation and the signal detection, which enables measurement of the phase making it ideal for pulsed radar applications. Two digital marker signals per channel can be generated with the same time resolution as the analog signal both in direct output mode and amplitude modulation mode.

Detection schemes

The UHF-AWG can be combined with a range of detection units in the same instrument:

- The Demodulator enables phase-sensitive detection with a best-in-class 5 MHz measurement bandwidth for pulsed RF measurements.
- The Pulse Counter conveniently processes PMT or similar pulse-like signals with rates up to 225 MHz.





- The Scope and Digitizer enable direct visualization of system response to a waveform stimulus.
- The Spectrum Analyzer supports high frequency resolution required in NMR spectroscopy, for example.

The setup schematics below and the options table on the following page serve to inspire thinking about how the UHF-AWG can meet your measurement needs.


Sequence branching and feed-forward

Using its branching capabilities, the UHF-AWG can select the next waveform based on external conditions, such as the state of the 32-bit digital input, or internal conditions, such as the value of a demodulated signal quadrature. The flow diagram at the bottom of the page illustrates flexibility in defining branching conditions to support different applications. Achieving sub-microsecond feed-forward times is a matter of a few sequencer commands and there is no need to manage low-level digital signal processing.

Typical applications of the UHF-AWG Arbitrary Waveform Generator

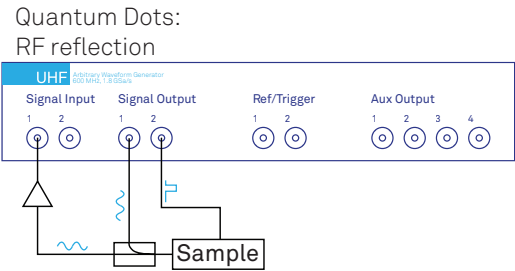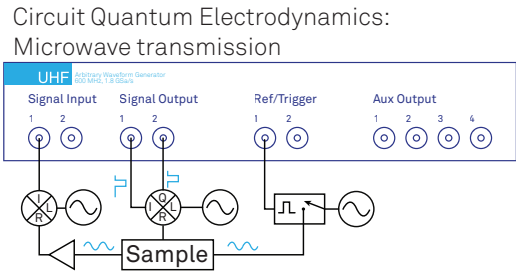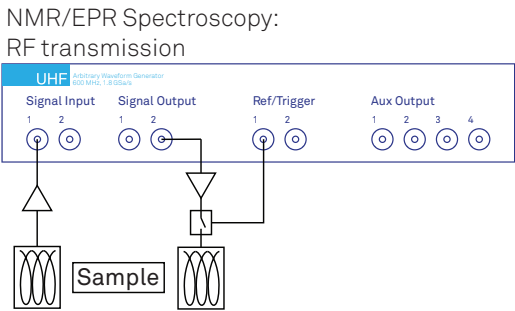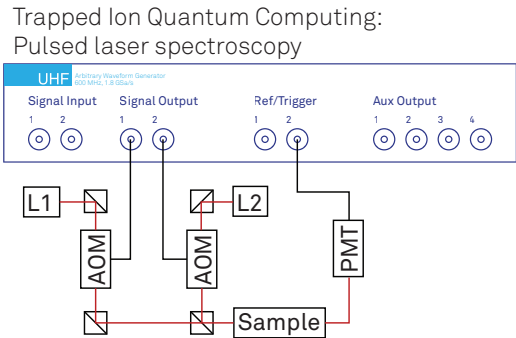

Flow diagram of the signal path for a fast feedback protocol. A feedback latency below 1 μ s is reached for a protocol including demodulation and conditional branching. Direct AWG trigger delay is less than 150 ns.

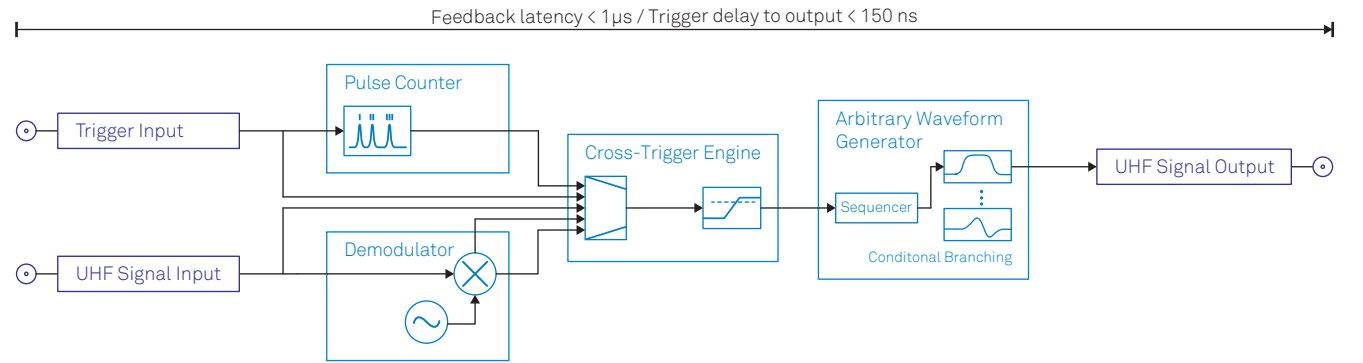

Specifications

General

Dimensions	45 × 35 × 10 cm (19" rack) 18 × 14 × 4 inch
Weight	6.4 kg; 14.1 lbs
Power supply	AC: 100–240 V; 50/60 Hz

UHF Signal Output

Frequency range	DC–600 MHz
Output ranges	±150 mV, ±1.5 V (high imp.)
Output impedance	50 Ω, DC coupled
Number of oscillators	up to 8
Phase noise	–120 dBc/Hz (10 MHz, offset 100 Hz)
Random jitter (RMS)	4.5 ps (synchronous trigger)


Arbitrary Waveform Generator

Channels	2
D/A conversion	14 bit, 1.8 GSa/s
Waveform memory	128 MSa/channel (main) 32 kSa/channel (cache)
Sequence length	1024 instructions
Markers	2/channel
Output modes	amplitude modulation, direct, 4-channel aux
Conditional branching inputs	32-bit digital input, trigger input, internal data (scope, demodulator, counter)
Trigger delay to output	<150 ns
Trigger uncertainty	2.2 to 4.4 ns (asynchronous trigger)
Feedback latency	<1 μs

Upgrade Options

Option	Main added functionality	Applications
UHF-MF	6 additional oscillators for signal generation and detection, I/Q modulation	Trapped ion quantum computing, circuit QED, frequency multiplexing
UHF-CNT	Pulse counting at up to 225 MHz frequency	Trapped ion quantum computing, photon counting
UHF-DIG	Dual-channel 12-bit, 1.8 GSa/s digitizer	Circuit QED, pulsed radar
UHF-BOX	Analysis of periodic signals with Boxcar Averager and Periodic Waveform Analyzer (600 MHz)	Pulsed laser spectroscopy, electrical pump-and-probe, time-domain reflectometry
UHF-LIA	8 dual-phase demodulators	RF reflectometry, circuit QED, NMR spectroscopy

The UHF-AWG Arbitrary Waveform Generator is available both as a stand-alone instrument and as an upgrade option to the UHFLI Lock-in amplifier.

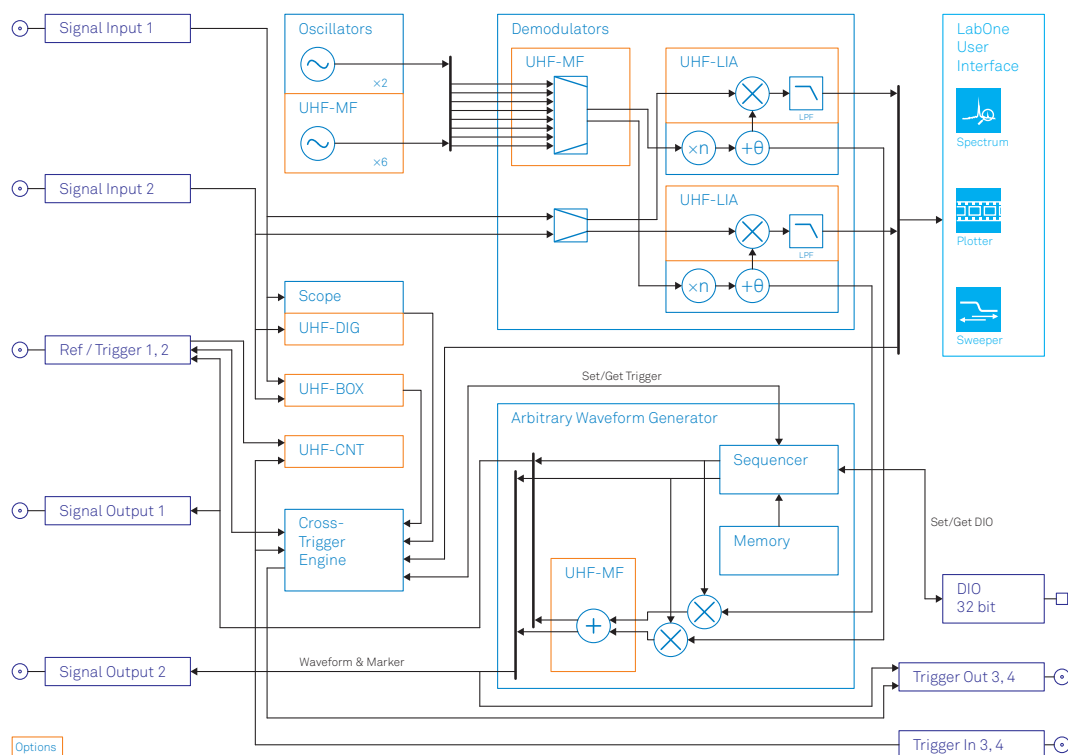

绿测科技有限公司

广州总部：广州市番禺区陈边村金欧大道83号江潮创意园A栋208室
深圳分公司：深圳市龙华区龙华街道 油松社区东环一路1号耀丰通工业园1-2栋2栋607
南宁分公司：广西自由贸易试验区南宁片区五象大道401号五象航洋城1号楼3519号
广州分公司：广州市南沙区凤凰大道89号中国铁建·凤凰广场B栋1201房
电话：020-2204 2442
传真：020-8067 2851
邮箱：Sales@greentest.com.cn
官网：www.greentest.com.cn



微信视频号



绿测科技订阅号



绿测工场服务号